


















# CABLE 109

## Hose Construction

- Tube:** Black, smooth, SBR rubber compound
- Reinforcement:** Synthetic textile fabrics
- Cover:** Black, abrasion, ozone and weather-resistant, SBR rubber compound

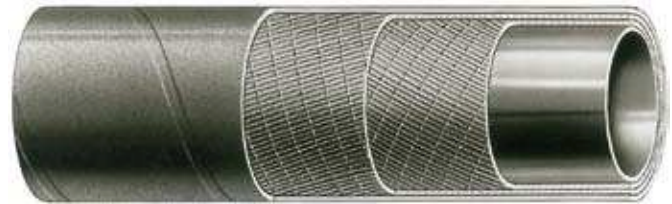

## Applications

Extra light-weight and flexible, recommended for protection and carrying welding and industrial cable.

## Temperature Range

-20 °C (-4 °F) to +80 °C (+176 °F)

## Tolerances

- RMA steel mandrel
- On inside diameter:**
- ≤ I.D. 38 mm: ± 0,79 mm
  - > I.D. 38 mm: ± 1,59 mm
- On outside diameter:** ± 1,59 mm
- Length tolerance:** ± 1 %

IHXXXXXXXXXX Part Number / Standard Length m	 I.D. mm	 O.D. mm	 Working Pressure			 Burst Pressure			 Weight kg/m	 min. Bend Radius mm
			MPa	psi	bar	MPa	psi	bar		
IH36832047/40	35	37	–	–	–	–	–	–	0,12	–
IH36832049/40	38	42	–	–	–	–	–	–	1,00	–
IH36832040/40	40	43	–	–	–	–	–	–	0,61	–
IH36832048/40	45	47	–	–	–	–	–	–	0,20	–